

12 EUROPEAN PATENT APPLICATION

21 Application number: 83301324.6

51 Int. Cl.<sup>3</sup>: B 68 G 9/00  
 A 47 C 27/06

22 Date of filing: 10.03.83

Vorlage	Ablage	U662
Haupttermin		
Eing.: 19. APR. 2005		
PA. Dr. Peter Riebling		
Bearb.	Vorgelegt.	

30 Priority: 17.03.82 IT 936182

43 Date of publication of application:  
 28.09.83 Bulletin 83/39

84 Designated Contracting States:  
 AT BE CH DE FR GB LI NL

71 Applicant: PERMAFLEX S.p.A.  
 Via Cristoforo Colombo 456  
 Rome(IT)

72 Inventor: Santarini, Luigi  
 Via Livornese 258/B  
 Port A Mare Pisa(IT)


74 Representative: Corin, Christopher John et al,  
 Mathisen Macara & Co. Lyon House Lyon Road  
 Harrow Middx. HA1 2ET(GB)

54 Method of producing elastic articles and mattresses made therefrom.

57 An elastic article (101) for use in the construction of a mattress is made up of a number of elongate strip elements (A,B,C,H) arranged side-by-side. Each element is made up of a series of closed pockets housing a spring. The spacing of the elements and/or the properties of said springs is such that the properties of elastic resilience of the article vary across its width so that it is most yielding at the centre.

*Handwritten notes:*  
 75 UES KUV  
 76 UES KUV  
 77 UES KUV  
 78 UES KUV  
 79 UES KUV  
 80 UES KUV  
 81 UES KUV  
 82 UES KUV  
 83 UES KUV  
 84 UES KUV  
 85 UES KUV  
 86 UES KUV  
 87 UES KUV  
 88 UES KUV  
 89 UES KUV  
 90 UES KUV  
 91 UES KUV  
 92 UES KUV  
 93 UES KUV  
 94 UES KUV  
 95 UES KUV  
 96 UES KUV  
 97 UES KUV  
 98 UES KUV  
 99 UES KUV  
 100 UES KUV

Fig.1

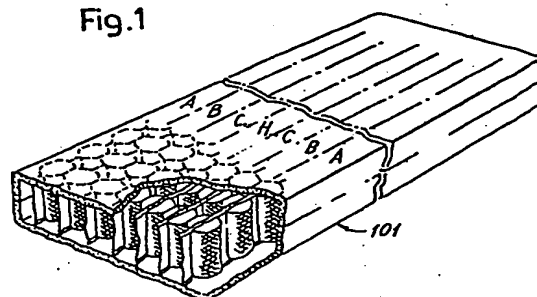

EP 0 089 789 A1

METHOD OF PRODUCING ELASTIC ARTICLES AND  
MATTRESSES MADE THEREFROM

The present invention relates to a method of producing elastic articles and also such elastic articles which  
5 are suitable for use in the manufacture of mattresses or other similar upholstered articles.

Elastic articles may be produced from a plurality of elongate strip elements each of which includes a series  
10 of pockets in which a spring is received. The pockets are closed-off at their upper and lower ends.

The present invention provides a method of producing an elastic article from a plurality of elongate strip  
15 elements each defining a series of pockets having closed upper and lower ends, and having a spring received in each said pocket, characterized in that the method includes the steps of assembling said plurality of elongate strip elements in side-by-side configuration, adhering a respective flexible layer to  
20 the upper and lower ends of said assembled elements to hold them together, and dividing said assembled elements transverse to said elongate direction to produce said elastic articles, wherein the property of elastic resilience and/or the transverse separation of the  
25 elements is such that the property of elastic resilience

- 2 -

varies across the article transverse of said elongate direction with the lowest yielding quality towards the centre of the article.

5 The invention also provides a method of producing an elastic article from a plurality of part articles, each part article being produced from a plurality of elongate strip elements each defining a series of pockets having closed upper and lower ends, and having a spring received in each said  
10 pocket, characterized in that the method includes the steps of assembling said plurality of elongate strip elements in side-by-side configuration, adhering a respective flexible layer to the upper and lower ends of said assembled elements to hold them together, and dividing said assembled elements  
15 transverse to said elongate direction to produce substantially rectangular elastic part articles, and assembling a plurality of said part articles in coplanar arrangement such that the adjacent part articles in at least one direction have different properties of elastic  
20 resilience.

The invention also includes a mattress formed from an elastic article produced by a method as defined above.

- 3 -

Some embodiments of the invention will now be described, by way of example only, with reference to the accompanying diagrammatic drawings, in which:

Fig. 1 shows a construction of an elastic article  
5 with rows of elongate strip elements, which rows are parallel and have elasticity characteristics which vary in a gradual manner;

Fig. 2 shows an elastic article made up of several part articles;

10 Figs. 3 and 4 show a two-layer construction of an elastic article made up of part articles;

Figs. 5 and 6 show an alternative two-layer construction;

Fig. 7 shows two diagrams of characteristics of  
15 the components of the article of Figs. 5 and 6;

Fig. 8 shows two diagrams similar to those of Fig. 7, but relating to the construction of Figs. 3 and 4;

Fig. 9 shows a piece of an elongate strip element as used as the elastic articles of Figures 1 to 5;

20 Figs 10, 11 and 12 show in two perspective and a plan view with cut-away portions, the structure of an elastic article; and

Fig. 13 shows a perspective view to illustrate the

manufacture of elastic articles in a continuous manner.

Referring initially to Figs. 9 to 12, a continuous elongate strip element is used as a starting article to produce the mattress structures. The strip element includes a  
5 mainly woven portion which defines pockets 1, inside which helical springs 3 are inserted. The springs are then held in the pockets 1 by closing - by sewing or otherwise - the longitudinal flaps 5 of the pockets until  
10 something in the manner of an upper flexible rib is constituted. Thus the pockets are closed at both upper and lower ends.

These elements are already in use for the formation of  
15 pillow or like structures, with hand stitching or other equivalent joining, whereby a section of such a continuous strip element is arranged in zig-zag fashion to constitute the surface of the pillow. The body of the actual pillow is formed from adjacent reversed sections  
20 of the element.

To enable automation, an elastic structure is made up of a plurality of pieces of the above-mentioned element, denoted by 7 in Figs. 10 to 12, placed side-by-side and  
25 joined at the top and bottom by two continuous flexible

- 5 -

layers 9 and 10, which are glued to the upper and lower ends of the pockets 1, to provide a continuous connection. Layers 9 and 10 may be of any material and design, to afford flexibility and resistance. In particular 5 these layers 9 and 10 may be made of fabrics of varying degrees of thickness e.g., netting, knitted fabrics, non-woven fabrics (i.e. of layers of fibres which are not arranged in particular order or spun, which are made to adhere together by felting with, if required, dressing 10 and sizing), or of other suitable materials, which may have varying consistency and elasticity.

To obtain springy structures or elastic articles for use in producing mattresses, a continuous method is 15 adopted. In this method a desired number of continuous elongate strip elements of the type shown in Fig. 9 are fed so that they lie side-by-side in a plane in which the pockets 1 and therefore the springs 3 of the various elements are aligned perpendicular to the 20 plane. As is shown in particular by reference 17 in Fig. 13, these continuous elements 17 are guided in this side-by-side configuration until they are placed in between two strips of the material intended to form layers 9 and 10, which strips are denoted by 19 and 20 25 and are shown as originating from reels A19 and A20. The strips of material 19 and 20 are provided with adhesive on the surface to be brought alongside the

elements 17 in such a manner that, when the two strips of material 19 and 20 are placed adjacent the opposite ends of the assembled elongate strip elements 17 they adhere and become joined to said elements 17, forming  
5 a continuous article. Elastic articles may be produced from this continuous article by means of successive transverse cuts.

Referring to Fig. 1, a manufactured elastic article  
10 101 for use in producing a mattress is made up of parallel rows of elongate strip elements with incorporated springs which extend over the entire length or at any rate for the entirety of one of the two principal dimensions of the manufactured article. The springs  
15 in each strip element possess the same characteristics of elasticity, dimensioning and separation. The strip elements of the various rows are denoted by the letters A, B, C,...H with an arrangement symmetrical about the centre line in the direction of the rows. The two  
20 elements A are the two outer ones and the element H is the central one. The outermost elements starting at least from B, are more yielding than the inner ones and the most central ones may have the same characteristics for a strip comprising a predetermined  
25 number of rows. The elements making up the central rows have characteristics of greater resistance to compression and deformation relative to the outer ones.

A mattress must normally be more resistant to compression in the central area than in the peripheral area, considered in plan. A variation may be produced also by means of a variation in the transverse separation  
5 between adjacent rows. The variation of characteristics may be continuous for the various elements A, B, C, ...H, ....C, B, A, or such a variation may be discontinuous, by providing groups of rows of strip elements side-by-side, the various elements of which each have the same elastic-  
10 ity characteristics, and the groups in a progressively outward movement from the centre having characteristics of greater yielding.

Fig. 2 shows an elastic article in which the concepts  
15 set out above may be implemented, but with the addition of variation of the elastic characteristics in a longitudinal direction in addition to a transverse direction. In Fig. 2 the elongate strip elements with their incorporated springs extend in the direction indicated by the double  
20 arrow f102, and the article is made up of several part articles 103 to 119. The part article 103 may be constructed in such a manner as to have maximum resistance to compression deformation; two articles 105 and 107 situated alongside 103 in a transverse direction may  
25 have a suppleness greater than that of article 103; the part articles 111, 113, and 117 and 119 at the corners may have even greater suppleness, i.e., maximum suppleness;



- 8 -

part articles 109 and 115 may have intermediate suppleness which may correspond, for example, to that of articles 105 and 107.

- 5 It is also possible for part articles 105, 103 and 107 to have the same characteristics of elasticity of lesser suppleness relative to that of the other articles which may have, relative to one another the same or different degrees of suppleness.

10

In Figs. 3 and 4 an elastic article construction is shown which is formed of two layers, each of which is made up of three part articles. 201, 203, and 205 denote three part articles in which the elongate strip elements may  
15 extend perpendicular or parallel to the adjacent edges of the side-by-side part articles. In either case the part article 203 has a resilient suppleness smaller than that of the part articles 201 and 205. A second layer of part articles is constituted by three longitudinal  
20 udinal part articles 207, 209 and 211, the adjacent edges of which are perpendicular to those of the adjacent edges of part articles 201, 203, 205. Part articles 207 may have a suppleness smaller than that of elements 209 and 211. The rows of elongate strip elements in  
25 these part articles are parallel to their adjacent edges. Thus, with only six elements, there is obtained an arrangement which is functionally similar to that of the article

of Fig. 2, which is made up of nine elements.

In every case the connection of the adjacent part articles may be achieved with connection layers extending through-  
5 out the area of the article, or partly, along adjacent areas. At the end, the adjacent part articles may be joined with the same connection layers provided for the adjacent strip elements which constitute the various part articles.

10

Fig. 5 and 6 show an article of mattress type which is made up of two part articles, one of which 301 has the strip elements extending in the direction of the arrow f301, while the other part article 305 has the strip  
15 elements extending in the direction of the arrow f305, i.e., perpendicular to the direction of the elements of the part article 301. Each of the two part articles 301, 305 may be made up with elongate strip elements with incorporated springs which have continuously or dis-  
20 continuously varying characteristics between the centre area and the peripheral areas. This variation is obtainable in part by variations of distance between centre lines of the elements. In this way there is obtained a variation of characteristics between the centre of the  
25 article and each of the sides.

Figure 7 shows by means of two diagrams the approximate variation of rigidity in the longitudinal and transverse direction for the article of Figures 5 and 6, which variation is seen to be continuous.

5

Fig. 8 shows a double diagram which shows discontinuous variations, such as may be obtained in an article like that of Fig. 3. The two diagrams of Figure 8 refer to the variation of rigidity along two perpendicular sections, longitudinal and transverse.

10

To obtain a certain peripheral stability of the mattress, it is preferable that the elongate strip elements which are arranged along the edges of the article, should have springs less yielding than those of the adjacent members, as shown in the diagrams of Figs, 7 and 8.

15

20

CLAIMS

1. A method of producing an elastic article (101,301, 305) from a plurality of elongate strip elements (17,A,B, C,H) each defining a series of pockets (1) having closed  
5 upper and lower ends, and having a spring (3) received in each said pocket (1),  
characterised in that  
the method includes the steps of assembling said plurality of elongate strip elements (17,A,B,C,H) in side-by-side  
10 configuration, adhering a respective flexible layer (9,10, 19,20) to the upper and lower ends of said assembled elements to hold them together, and dividing said assembled elements transverse to said elongate direction to produce said elastic articles (101,301,305), wherein  
15 the property of elastic resilience and/or the transverse separation of the elements is such that the property of elastic resilience varies across the article (101,301, 305) transverse to said elongate direction with the lowest yielding quality towards the centre of the article.

20

2. A method of producing an elastic article from a plurality of part articles (103,105,107,109,111,113,115, 117,119,201,203,205,207,209,211), each part article being produced from a plurality of elongate strip elements (17)  
25 each defining a series of pockets (1) having closed upper

and lower ends, and having a spring (3) received in each said pocket (1),

characterised in that

the method includes the steps of assembling said

- 5 plurality of elongate strip elements (17) in side-by-side configuration, adhering a respective flexible layer (9,10,19,20) to the upper and lower ends of said assembled elements (17) to hold them together, and dividing said assembled elements (17) transverse to said elongate
- 10 direction to produce substantially rectangular elastic part articles, and assembling a plurality of said part articles (103,105,107,109,111,113,115,117,119,201,203,205, 207,209,211) in coplanar arrangement, such that the adjacent part articles in at least one direction have
- 15 different properties of elastic resilience.

3. A method of producing an elastic article characterised by further including the step of arranging two elastic articles (201,203,205; 207,209,211) produced
- 20 by a method according to claim 2, one above the other such that the strip elements (17) of one said elastic article (201,203,205) extend in a direction perpendicular to that of the strip elements of the other elastic article (207,209,211).

4. A method according to claim 3, characterised in that each of said two elastic articles comprises at least three part articles (201,203,205; 207,209,211), the property of elastic resilience of the central part  
5 article (203,207) being such that this central part article (203,207) is less deformable than the adjacent part articles (201,205;209,211).

5. A method as claimed in any one of the preceding  
10 claims, characterised in that the elastic resilience of the strip elements (17) extending along the edges of the article (301,305) are such that these elements are less yielding than adjacent elements (Fig.7 and 8).

15 6. A method of producing an elastic article characterised by including the step of arranging two elastic articles (301,305) produced by a method according to claim 1, one above the other such that the strip elements (17) of one said elastic article (301) extend  
20 in a direction (F301) perpendicular to that (F305) of the strip elements (17) of the other elastic article (305).

7. A mattress characterised in that it includes an  
25 elastic article produced by a method as claimed in any

one of the preceding claims.

8. An elastic mattress element (101; 103,105,107,109  
111,113;201,203,205; 207,209,211; 301; 305) including a  
5 plurality of elongate strip elements (17,A,B,C,H) each  
defining a series of pockets -(1) having closed upper and  
lower ends, and having a spring (3) received in each said  
pocket (1),  
characterised in that  
10 said strip elements (17,A,B,C,H) are arranged side-by-  
side, the side-wise spacing between adjacent strip  
elements (17,A,B,C,H) and/or the properties of said  
springs (3) in said adjacent strip elements (17,A,B,C,H)  
being such that the properties of elastic resilience of  
15 the mattress element vary at least from side to side so  
that the mattress element has its lowest yielding quality  
towards the centre.

9. A mattress element including two mattress elements  
20 (201,203,205; 207,209,211; 301,305) according to claim 8,  
arranged one above the other with the strip elements (17)  
of one mattress element (201,203,205; 301) extending  
substantially perpendicular to those of the other said  
mattress element (207,209,211; 305).

1/5

0089789

Fig.1

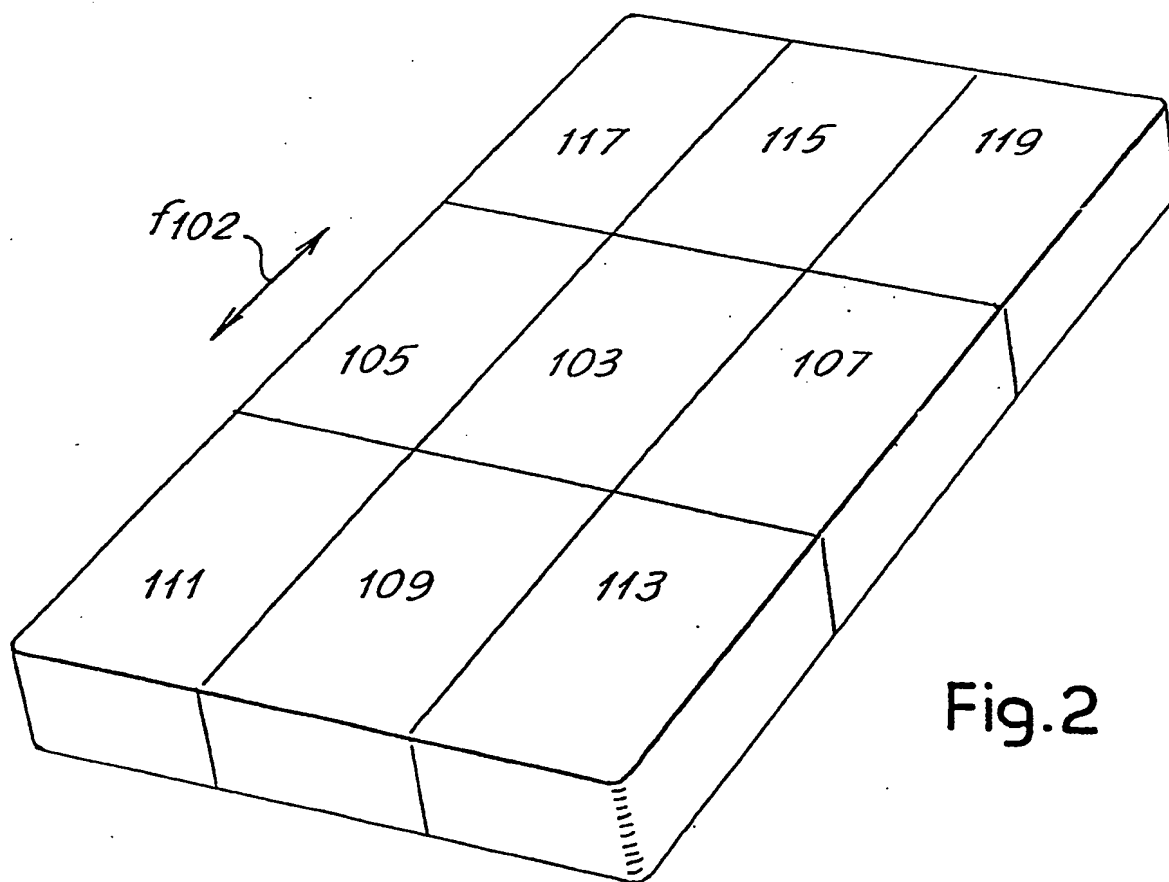
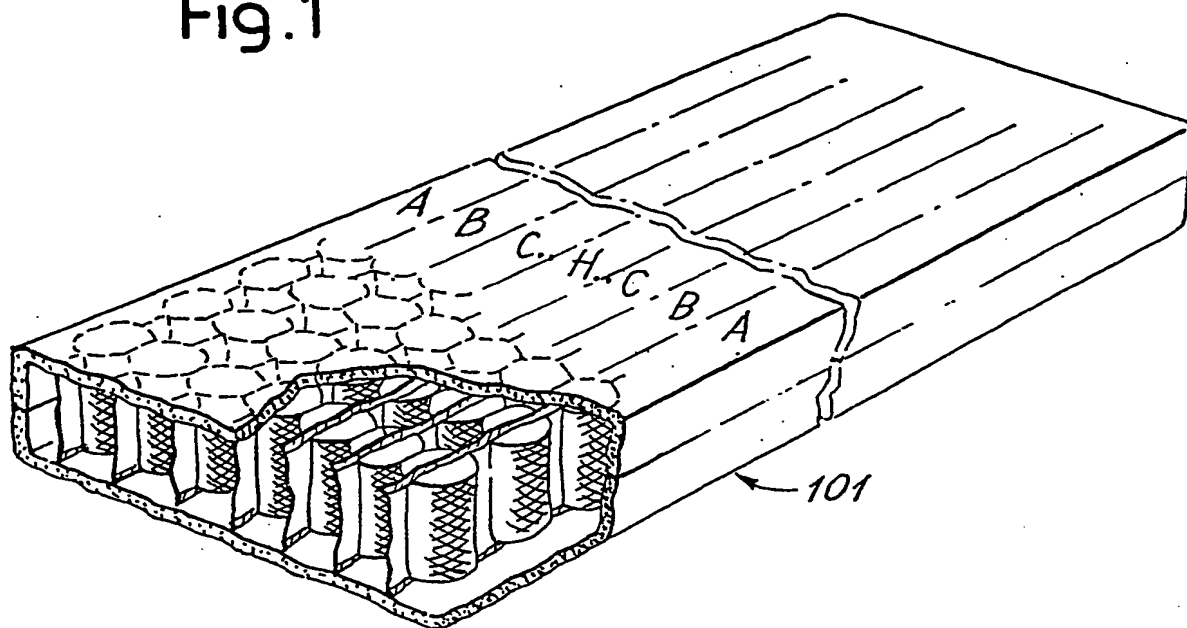


Fig.2



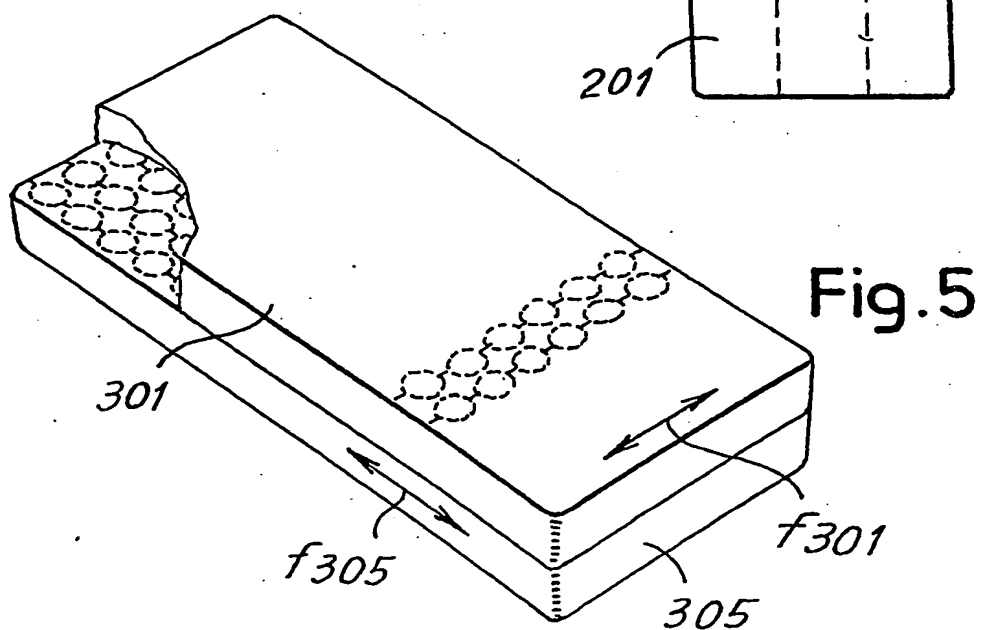
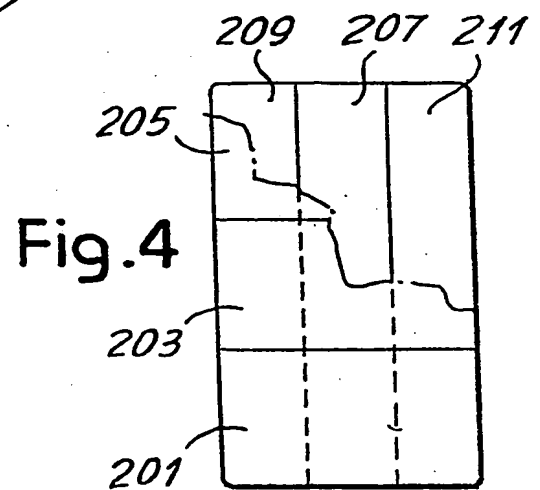
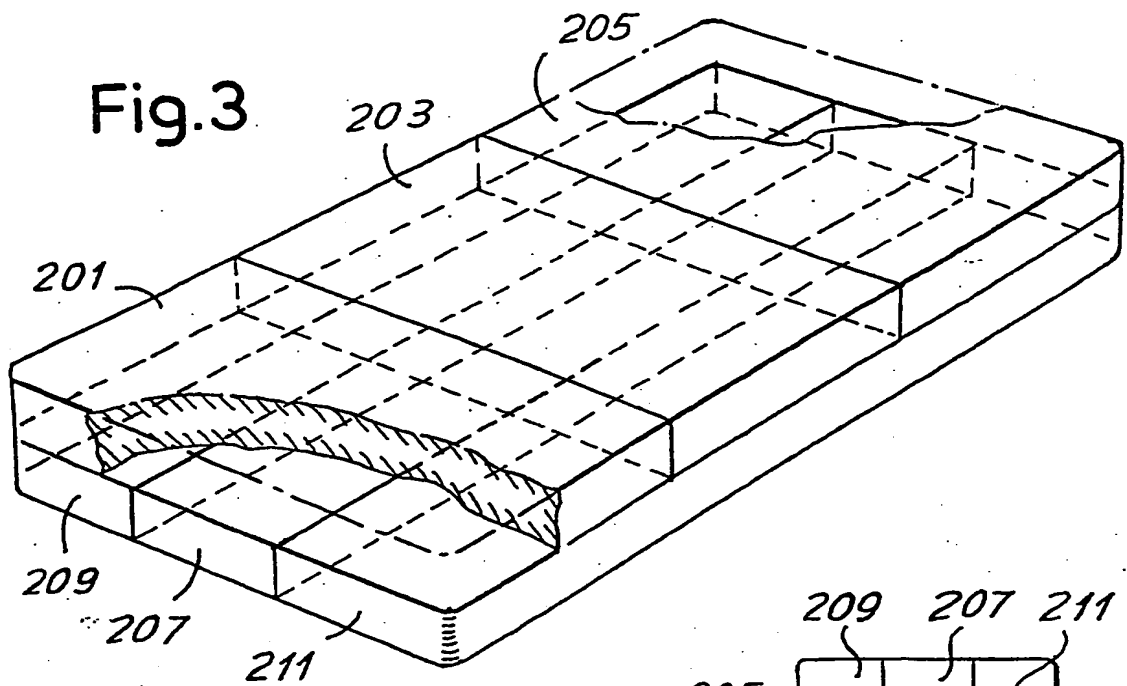


Fig.6

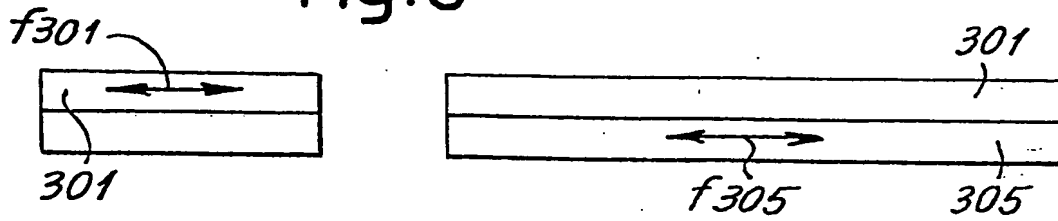


Fig.7




Fig.8

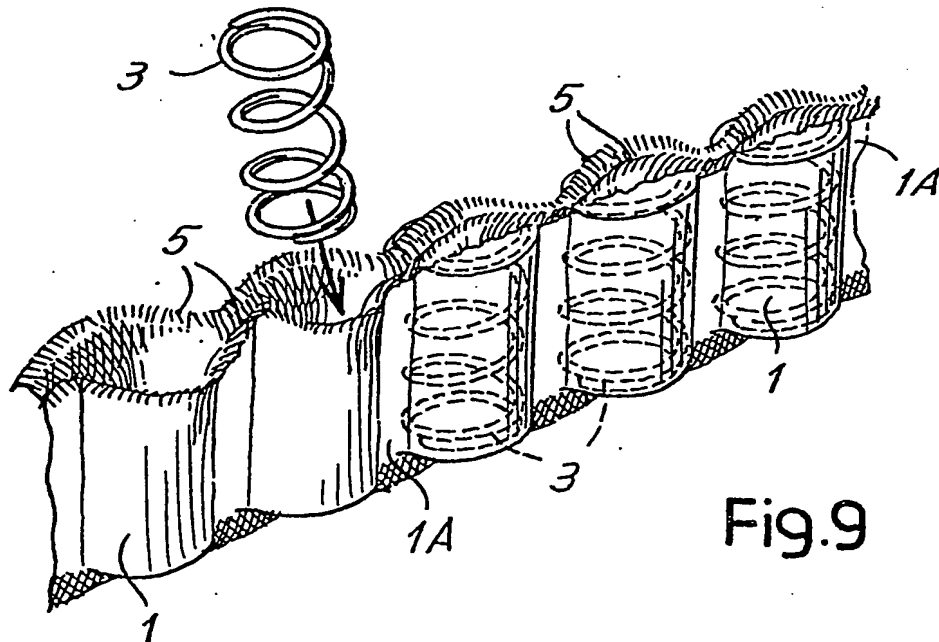



Fig.9

Fig.10

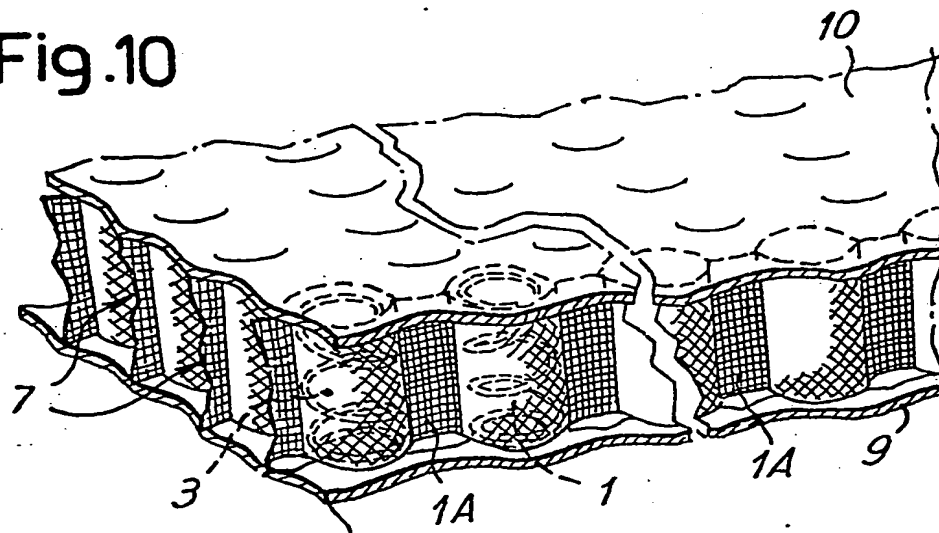


Fig.11


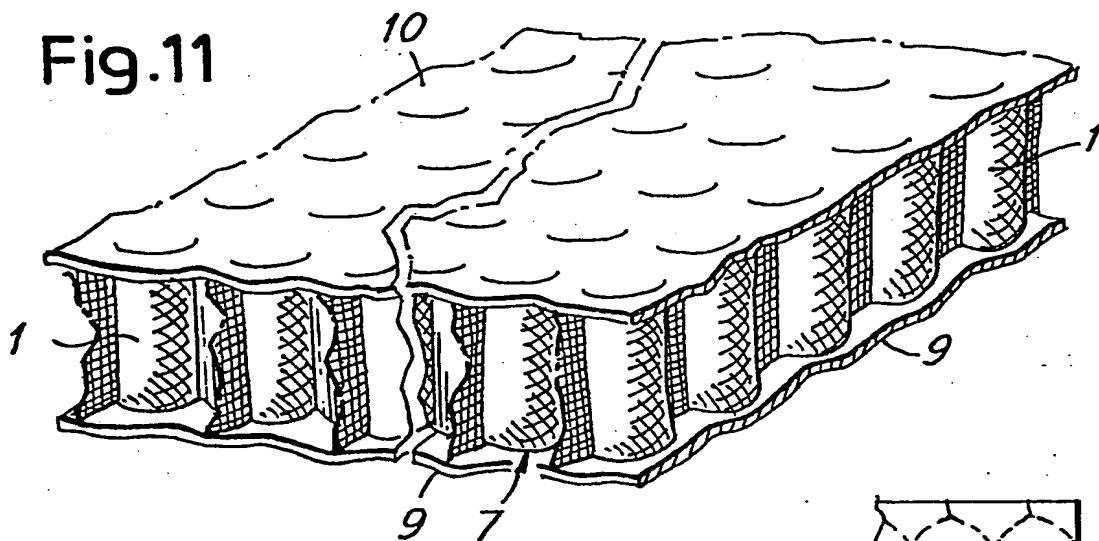


Fig.12

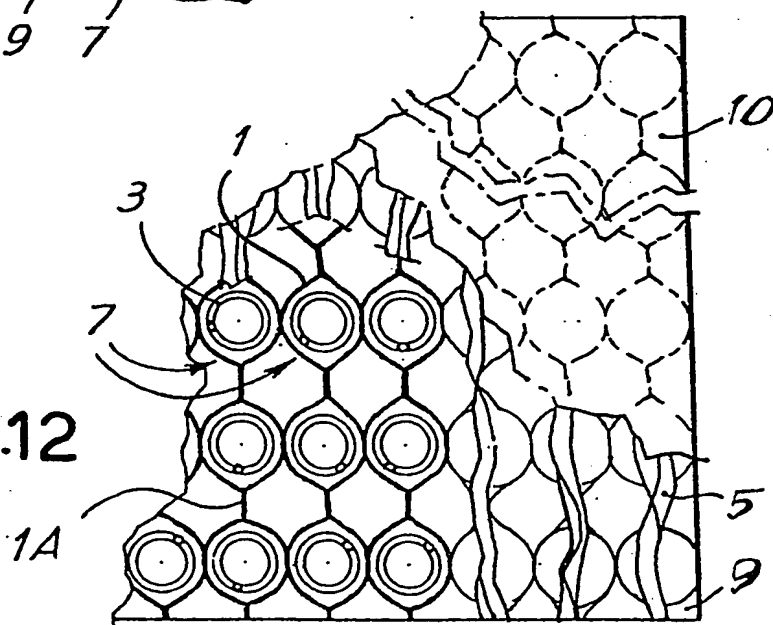

5/5

0089789

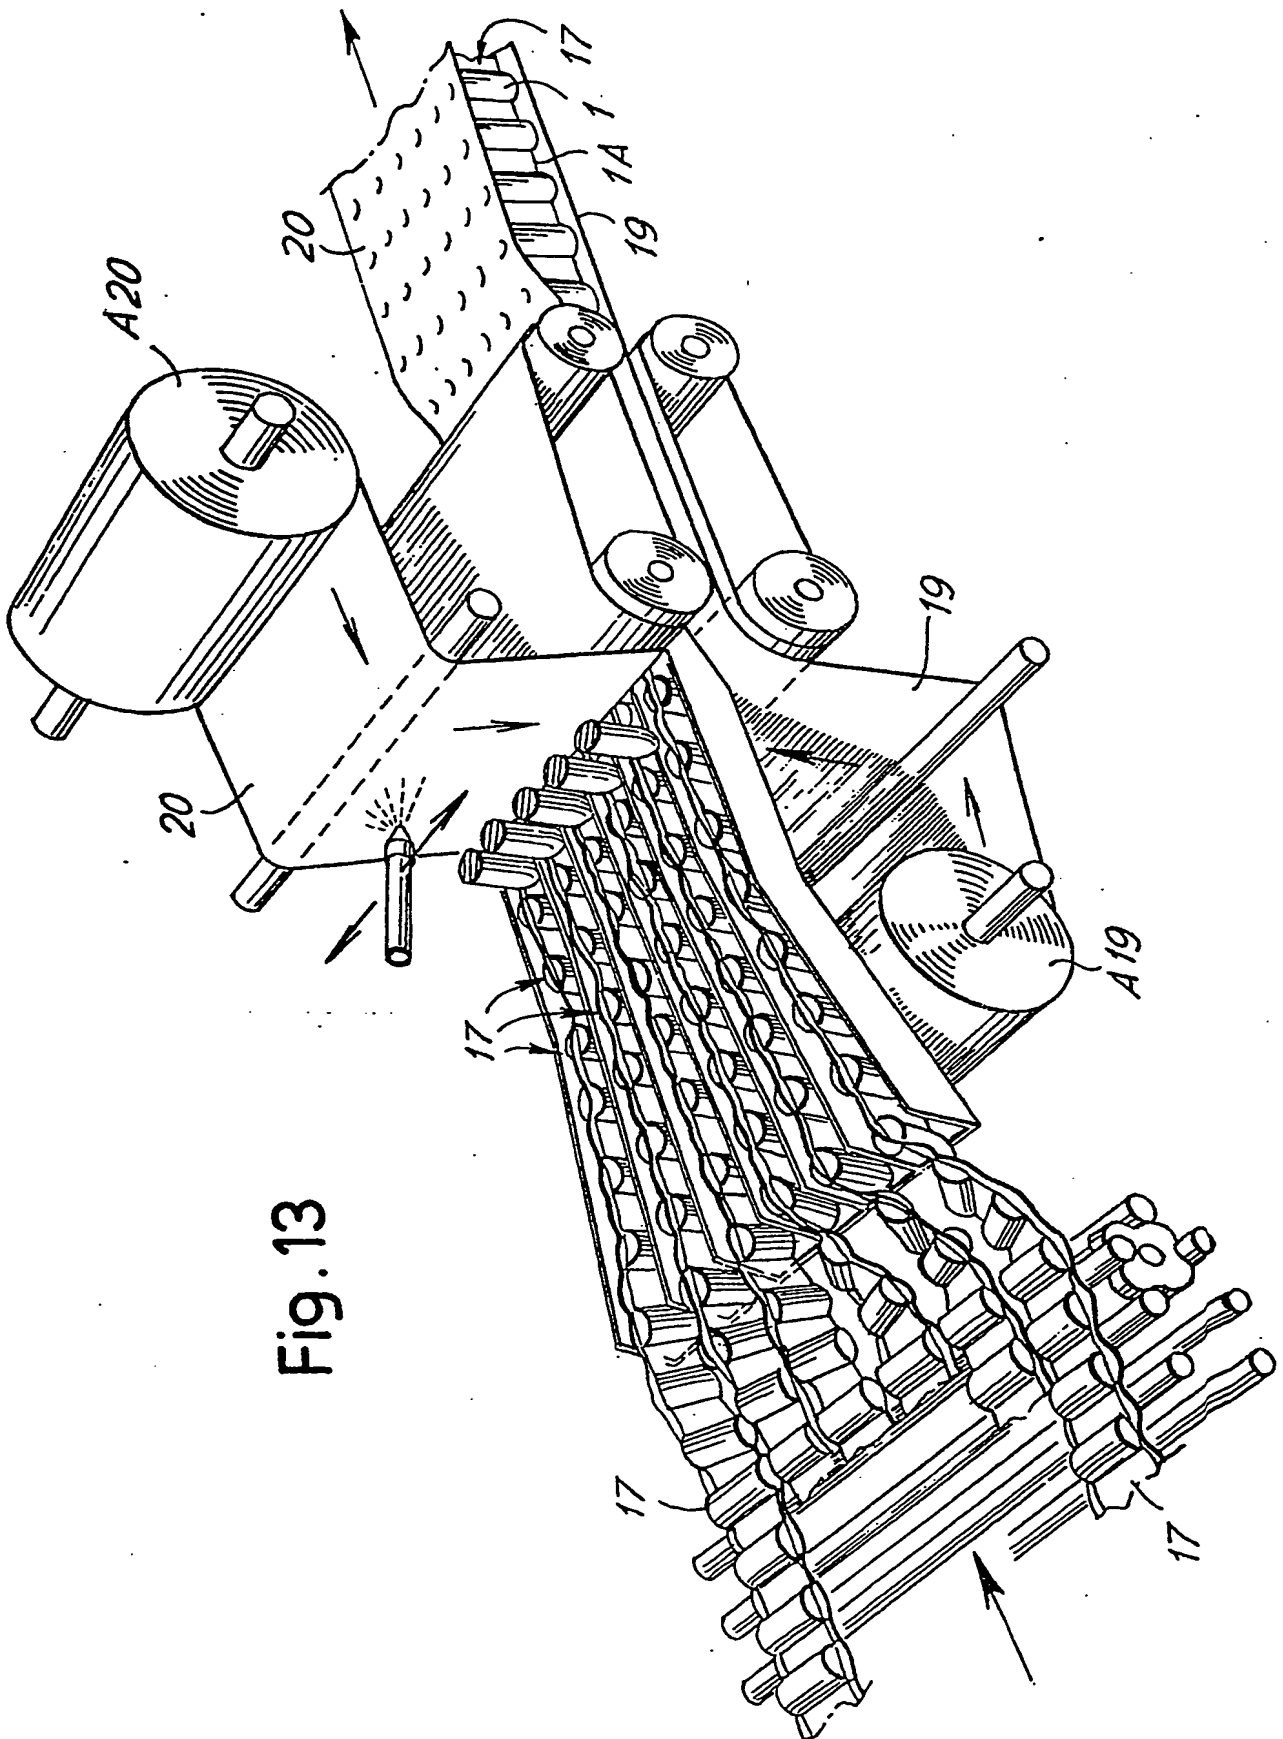


Fig. 13



European Patent  
Office

# EUROPEAN SEARCH REPORT

008978.9  
Application number

EP 83 30 1324

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
A	US-A-1 747 374 (McINERNEY)  * Whole document *	1, 2, 7, 8	B 68 G 9/00 A 47 C 27/06
A	WO-A-8 102 384 (JOURDAN)  * Whole document *	1, 2, 5, 7	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 3)
			B 68 G A 47 C
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28-06-1983	Examiner MARTIN A.
<b>CATEGORY OF CITED DOCUMENTS</b>			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons  & : member of the same patent family, corresponding document	

EPO Form 1503, 03.82

**THIS PAGE BLANK (USPTO)**